

SPECIFICATION

Dehler  **42**



TECHNICAL DATA

LOA 12.84 m / 42' 2"

HULL LENGTH 12.42 m / 40' 9"

LWL 11.50 m / 37' 9"

BEAM 3.91 m / 12' 10"

DRAUGHT
 standard 2.15 m / 7' 1"
 L-keel medium 2.16 m / 7' 1"
 competition 2.38 m / 7' 10"
 shallow keel 1.98 m / 6' 6"

BALLAST
 standard 3.00 t / 6,614 lbs
 L-keel medium 3.00 t / 6,614 lbs
 competition 2.60 t / 5,732 lbs
 shallow keel 3.25 t / 7,165 lbs

DISPLACEMENT
 standard 9.10 t / 20,062 lbs
 L-keel medium 9.20 t / 20,282 lbs
 competition 8.70 t / 19,180 lbs
 shallow keel 9.50 t / 20,943 lbs

ENGINE APPROX. Diesel 29 PS / hp

FRESH WATER approx. 295 l / 77.93 gal

FUEL TANK approx. 160 l / 42.27 gal

MAST ABOVE WL
 standard 19.50 m / 63' 12"
 competition 20.25 m / 66' 4"

TOTAL SAIL AREA
 standard 93.00 m² / 1,001 sq ft
 competition 105.50 m² / 1,135 sq ft

MAIN SAIL
 standard 52.50 m² / 565 sq ft
 competition 57.50 m² / 618 sq ft

FURLING JIB 105%
 standard 41.00 m² / 441 sq ft
 competition 43.00 m² / 462 sq ft

SPINNAKER
 standard 130.00 m² / 1,399 sq ft
 competition 145.00 m² / 1,560 sq ft

GENNAKER
 standard 120.00 m² / 1,291 sq ft
 competition 145.00 m² / 1,560 sq ft

FREERIDE
 standard 72.00 m² / 775 sq ft
 competition 78.90 m² / 849 sq ft

RIG
 standard
 I 16.44 m / 53' 11"
 J 4.63 m / 15' 2"
 P 16.10 m / 52' 10"
 E 5.70 m / 18' 8"
 competition
 I 16.90 m / 55' 5"
 J 4.63 m / 15' 2"
 P 16.90 m / 55' 5"
 E 5.80 m / 19' 0"

CE CERTIFICATE A - 10

DESIGN judel/vrolijk & co.


INTERIOR Dehler

All measurements/figures are approximate. Errors and omissions excepted. Specification and material can be changed without notice. Valid from 2019.07.01.

DECK AND INTERIOR LAYOUTS


Dehler  **42**

DECK LAYOUT

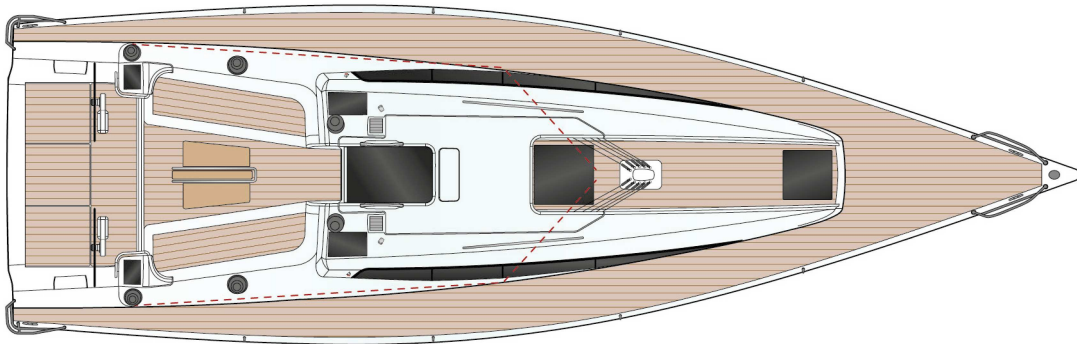


INTERIOR LAYOUT

STANDARD

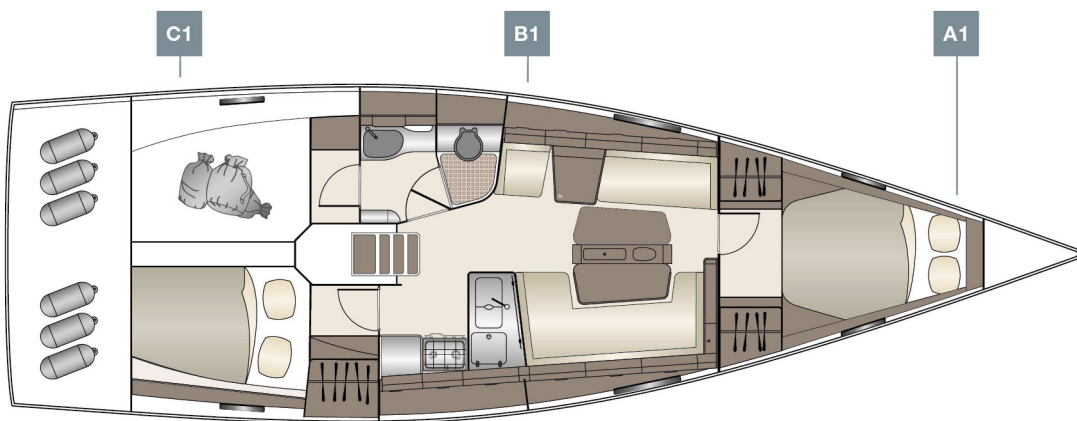

OPTION

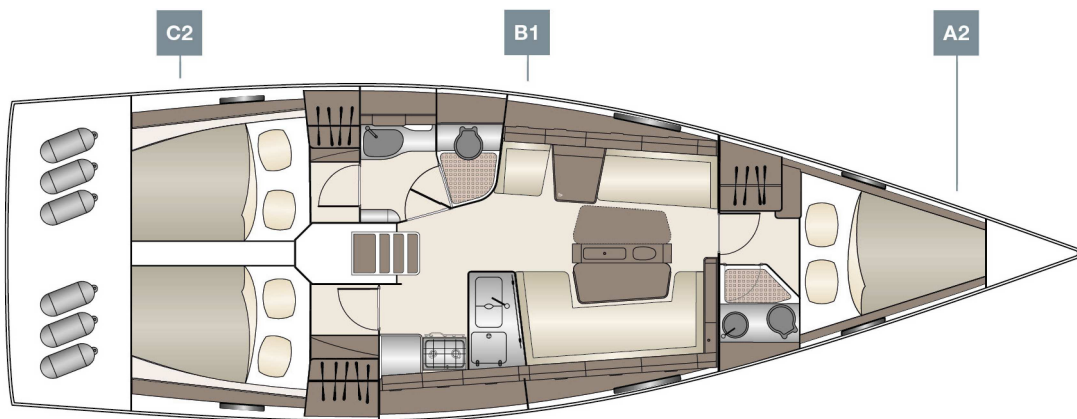

HULL

- GRP hull, isophthalic gelcoat, colour: Signal White (RAL 9003), 1st layer vinyl ester resin with PVC foam core built in vacuum infusion
- Waterline and cove line, isophthalic gelcoat, colour: Dark Blue (RAL 5004)

KEEL

- T-keel, cast iron, standard draft: 2.15 m
- GRP rudder with sea-water resistant aluminium shaft and selfaligning bearings

LAYOUT & INTERIOR

- A1: Master cabin with double V-berth, hanging locker and shelves
- B1: Saloon with L-galley, dining area on stb and sofa with sliding chart table on port - separate head with shower stall on port
- C1: Aft cabin with double berth, locker and storage on stb, large storage space on port with entrance from head
- 2-burner gas stove, waste bin, 12 V fridge approx. 130 l, double stainless steel sink with mixing tab
- Interior furniture in high quality marine plywood, satin varnish
- Dehler companionway closing system
- Saloon table, folding with stowage
- Worktop in galley, White
- SLS - Scenario light system touch screen controller with dimmer for saloon

WOOD (FURNITURE, FLOORBOARD)

- Furniture - Mahogany
- Floorboard - Australian Acacia

UPHOLSTERY

- Mattresses for all berths
- Upholstery - Baltic, colour: creme
- Upholstery Piping (colour selection)

DECK & OUTSIDE EQUIPMENT

- GRP deck with antislip surface, isophthalic gelcoat, colour: Signal White (RAL 9003), 1st layer vinyl ester resin with balsa sandwich core. Cockpit locker on port, stern lockers on port and stb, anchor locker at bow.
- Cockpit bottom, gelcoat colour: Signal White (RAL 9003)
- Teak on coach roof
- Teak on cockpit benches
- Twin wheel steering system with emergency tiller
- 2 stainless steel steering wheels with leather cover
- Pulpit and pushpit, stainless steel
- Railing, incl. stanchions and stainless steel wire
- Halyards and control lines with organizers and jammers on coach roof, 4 retractable mooring cleats, handrails on coach roof
- 2 LEWMAR 45 Race manual halyard winches
- 2 LEWMAR 45 Race manual secondary winches
- 2 LEWMAR 45 Race manual mainsheet winches
- Swimming ladder
- Life raft storage

- Rub rail, aluminium
- Bow fitting with anchor roller
- Genoa tracks, incl. cars, adjustable from cockpit
- German mainsheet system with adjustable traveller
- 4 deck hatches - openable, anchor locker hatch
- 6 deck coach roof windows - openable, portlights in cockpit sides for aft cabins

RIG & SAILS

- Rig, anodized aluminium, keel stepped incl.: dyform rigging, running rigging, kicker, manual jib furler below deck, "Dehler Quick Reefing System", manual backstay tensioner
- ELVSTRÖM FCL performance sails - full battened, triradial, main and jib
- Dyneema halyards for main and jib

NAVIGATION & INSTRUMENTS

- 2 illuminated compasses at steering pedestal
- Navigation lights - LED

PROPULSION

- Fuel tank, approx. 160 l
- Engine (Diesel, approx. 29 hp) - saildrive, 2 blade folding propeller

EQUIPMENT

- 12 V and 230 V electric system with main panel, 12 V and 230 V socket and 230 V shore power.
- AGM battery set - capacity: Starter battery: 1 x 90 Ah, service battery: 1 x 160 Ah
- Country Version: EU / AUS
- Battery charger 35 A
- Manual toilet with sea water flush (B layout)
- Shower unit in cockpit, warm-/coldwater
- LPG gas system, stowage for 1 bottle
- Manual and electric bilge pump
- Blackwater system (appr. 35 l) with deck extraction and seacock for head
- Freshwater system with electric pump and 20 l hotwater, heated also by main engine
- Fresh water tank, appr. 295 l

SHIPPING & TRANSPORT

- CE - Certificate cat. A - 10
- Owners manual
- EC - Type Examination Certificate